


Live 8 setup 'faderfox LV3'

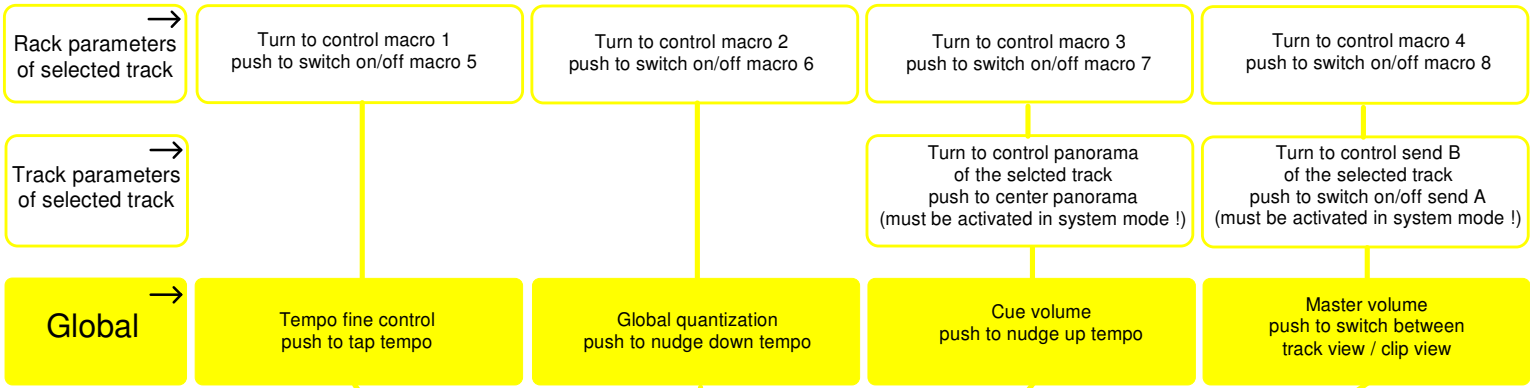

Sys led
lit = system mode is active
blinks = controller isn't recognized

Select FX-tracks (indicated by FX led, lit = Send A, blinks = send B)

Global play

Selects a track (indicated by green leds)

Programmable function (status indicated by green leds) default = Send A

Track volume

Programmable function (status indicated by red leds) default = clip stop (lit = stop)

Programmable function (status indicated by red leds) default = track control

Switch on/off macro 6 in the rack of send A track or in the selected track

for free use

Select Master-track (indicated by master led)

Global stop


Press both FX & master buttons and hold for about 1 second to enter/leave system mode

Programmable function (status indicated by green leds) default = clip launch
off = slot empty
lit = clip loaded
blinking = clip plays

Programmable function (status indicated by green leds) default = track activators

Switch on/off macro 6 in the rack of send B track

for free use

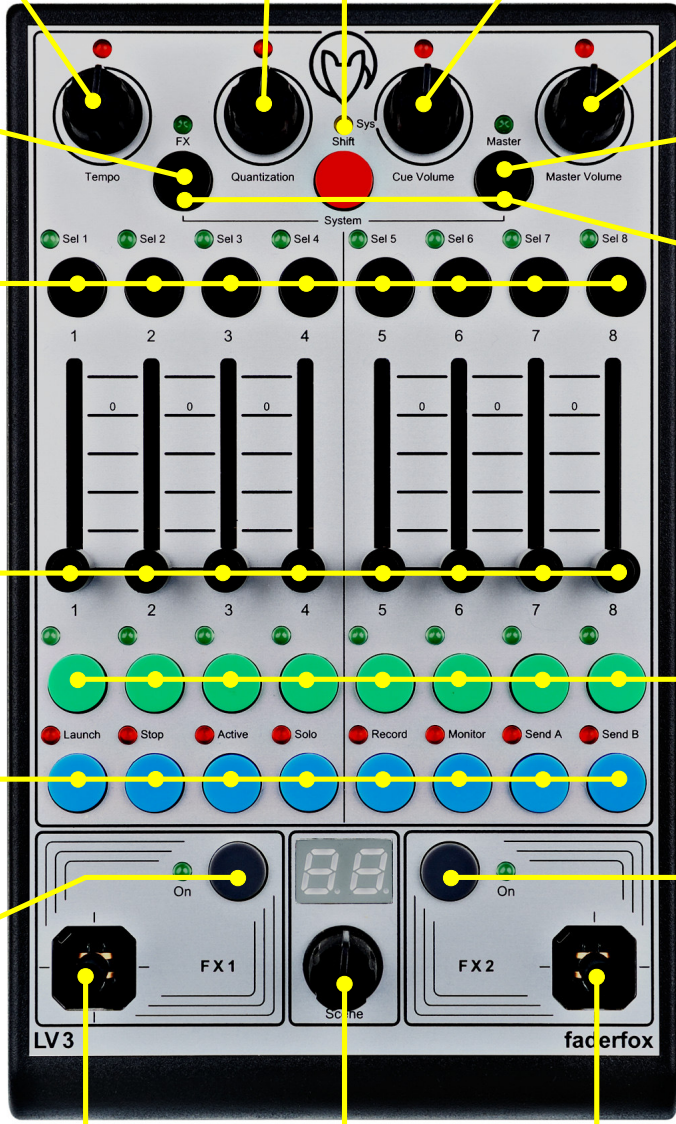

Control macro 7 (X) & 8 (Y) in the rack of send A track or in selected track

Control macro 7 (X) & 8 (Y) in the rack of send B track

Scene selection up/down
Push to start highlighted scene/clip (selected scene number is displayed above)

Shift the track window (first track number is displayed above)
Push to stop highlighted scene/clip

! Hold shift button for 2nd functions written on yellow (light gray) background